



## TECHNICAL DATA

### MASSES

Max. operating mass	9,600 kg
Operating mass (incl. ROPS)	9,200 kg
Module mass (front/rear)	4600/4600 kg

### COMPACTION

Centrifugal force (high/low amplitude)	130/60 kN
Nominal amplitude (high/low)	0.9 /0.4 mm
Static linear load (front/rear)	27.2 /27.2 kg/cm
Vibration frequency	36/54 Hz

### TRACTION

Speed range	0-12 km/h (Working/Travel)
Vertical oscillation	±7°
Max. theoretical gradeability	39 %

### HYDRAULIC SYSTEM



Driving	Axial piston pump with variable displacement. Axial piston motor with variable displacement.
Vibration	Axial piston pump with variable displacement. Axial piston motor with fixed displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake.

### ENGINE

Manufacturer /Model	Cummins T3/QSB 3.3
Type	Water cooled Diesel
Rated power, SAE J1995	74 kW (99) @2200rpm
Fuel tank capacity	180 l
Emission stage	IIIA/T3

Find us locally at [www.dynapac.in](http://www.dynapac.in)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

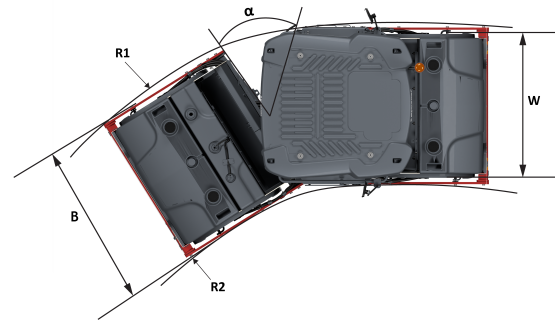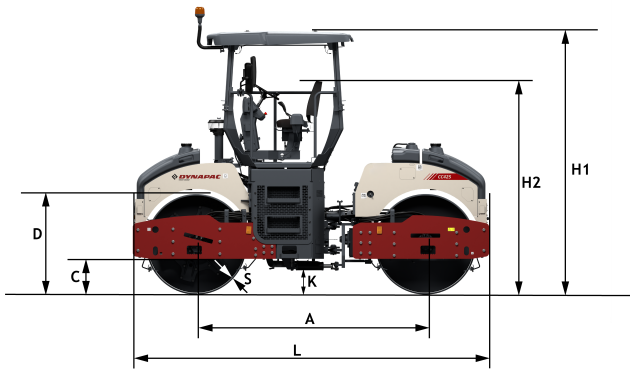

## DIMENSIONS

### DIMENSIONS

C. Curb clearance	400 mm
D. Drum diameter	1220 mm
H1. Height, with ROPS/cab	3200 mm
H2. Height, w/o ROPS/cab	2450 mm
K. Ground clearance	282 mm
L. Length	4340 mm
R1. Turning radius, outside	6500 mm
R2. Turning radius, inside	4900 mm
S. Drum shell thickness	17 mm
W. Drum width	1690 mm
α. Steering angle	±29°

### STANDARD EQUIPMENT

- Adjustable seat
- Back up alarm
- Double amplitudes
- Driving lights
- Emergency stop
- Hour meter
- Lockable instrument panel cover
- Rear view mirrors
- Safety belt
- ROPS
- Horn
- 2 scraper per drum
- Sunroof
- 1 sprinkling pump
- 4 LED working light
- USB mobile charger
- Mobile holder
- Water bottle holder

### OPTIONAL EQUIPMENT

- Dyn@link Basic field kit
- Dyn@link Basic factory fitted
- Rotating beacon field kit

Find us locally at [www.dynapac.in](http://www.dynapac.in)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.